


SOT-89-3L Plastic-Encapsulate Transistors

PXT3904 TRANSISTOR (NPN)

• Features

- Complimentary to PXT3906



1. BASE
2. COLLECTOR
3. EMITTER

SOT-89-3L

• MAXIMUM RATINGS (T_C=25°C)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V _{CB0}	60	V
Collector-Emitter Voltage	V _{CEO}	40	V
Emitter-Base Voltage	V _{EBO}	6	V
Collector Current	I _C	0.2	A
Collector Power Dissipation	P _C	500	mW
Thermal Resistance From Junction To Ambient	R _{θJA}	250	°C/W
Operation Junction and Storage Temperature Range	T _J , T _{stg}	-55~+150	°C







• ELECTRICAL CHARACTERISTICS (T_a=25°C)



Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =10μA, I _E =0	60			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =1mA, I _B =0	40			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =10μA, I _C =0	6			V
Collector cut-off current	I _{CBO}	V _{CB} =30V, I _E =0			0.05	μA
Emitter cut-off current	I _{EBO}	V _{EB} =6V, I _C =0			0.05	μA
Collector ut-off current	I _{CEX}	V _{CE} =30V, V _{BE(off)} =3V			0.05	μA
DC current gain	h _{FE(1)}	V _{CE} =1V, I _C =0.1mA	60			
	h _{FE(2)}	V _{CE} =1V, I _C =1mA	80			
	h _{FE(3)}	V _{CE} =1V, I _C =10mA	100		300	
	h _{FE(4)}	V _{CE} =1V, I _C =50mA	60			
	h _{FE(5)}	V _{CE} =1V, I _C =100mA	30			
Collector-emitter saturation voltage	V _{CE(sat)1}	I _C =10mA, I _B =1mA			0.2	V
	V _{CE(sat)2}	I _C =50mA, I _B =5mA			0.3	V
Base-emitter saturation voltage	V _{BE(sat)1}	I _C =10mA, I _B =1mA	0.65		0.85	V
	V _{BE(sat)2}	I _C =50mA, I _B =5mA			0.95	V
Transition frequency	f _T	V _{CE} =20V, I _C =10mA, f=100MHz	300			MHz
Collector capacitance	C _C	V _{CB} =5V, I _E =0, f=1MHz			4	pF
Emitter capacitance	C _e	V _{EB} =0.5V, I _C =0, f=1MHz			8	pF
Noise figure	NF	V _{CE} =5V, I _C =0.1mA, f=10Hz-15.7kHz, R _S =1KΩ			5	dB
Delay time	t _d	I _C =10mA, I _{B1} =-I _{B2} = 1mA			35	ns
Rise time	t _r				35	ns
Storage time	t _S				200	ns
Fall time	t _f				50	ns

• Ordering Information:


Part NO.	PXT3904
Marking	1A
Packing Information	REEL TAPE
Basic ordering unit (pcs)	1000

• Typical Characteristics

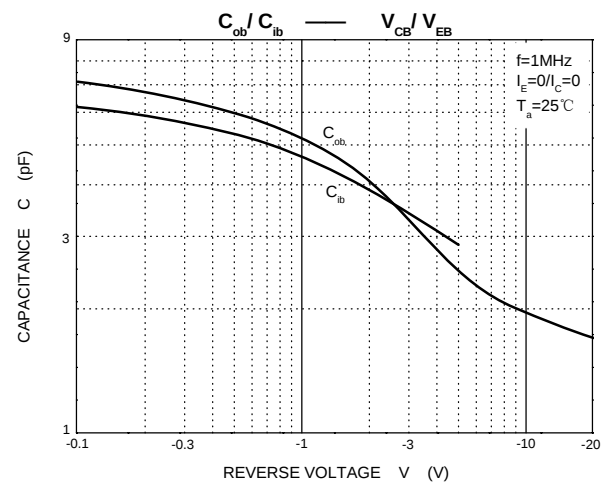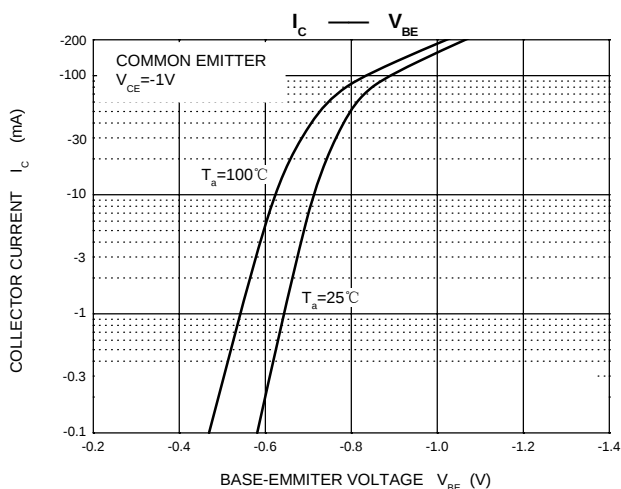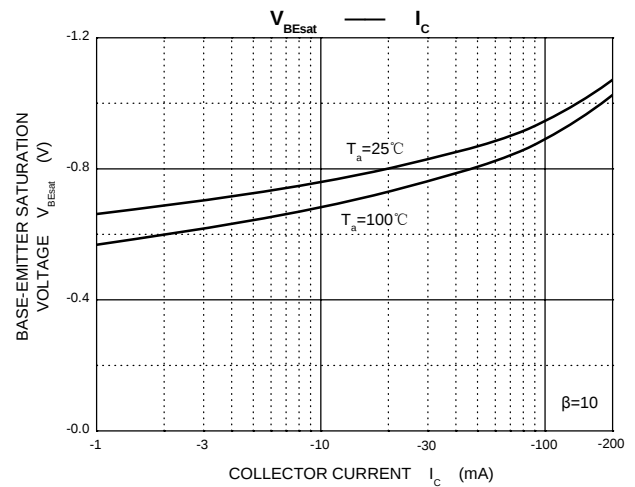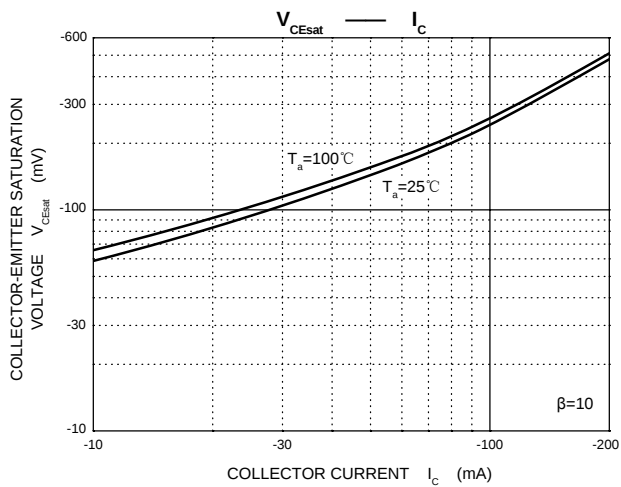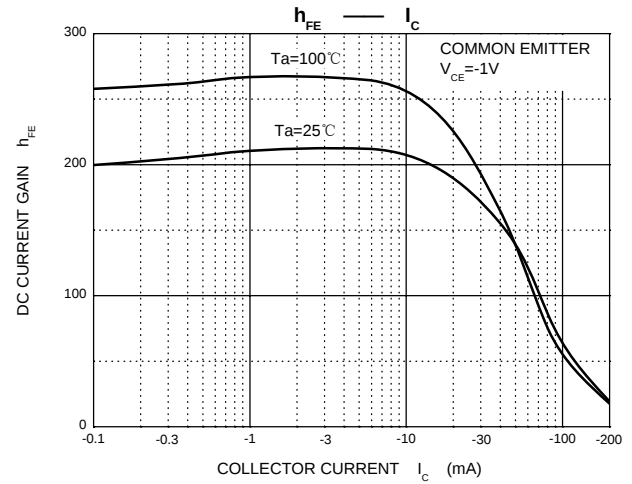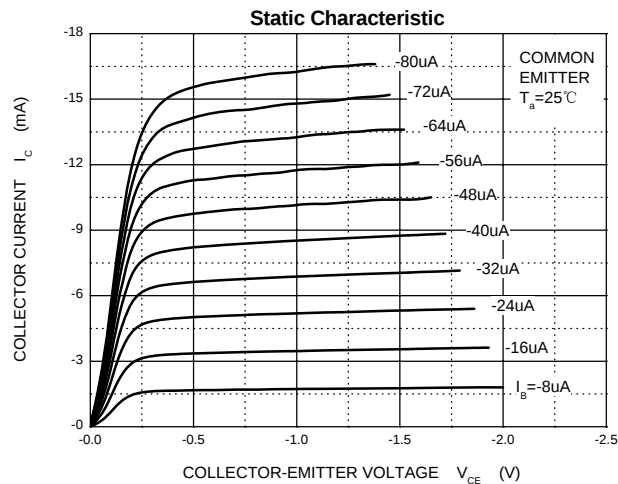


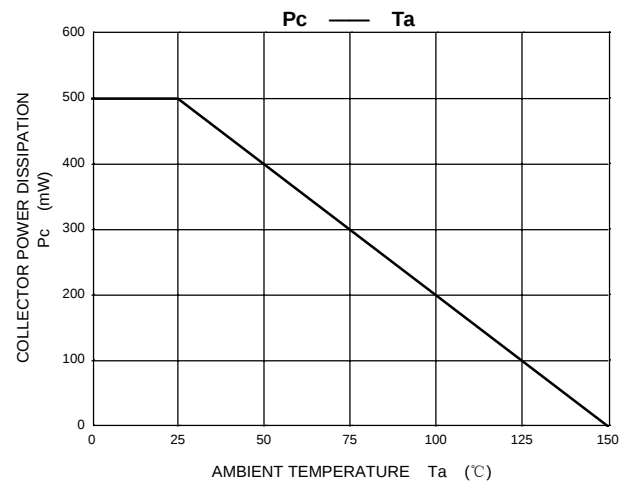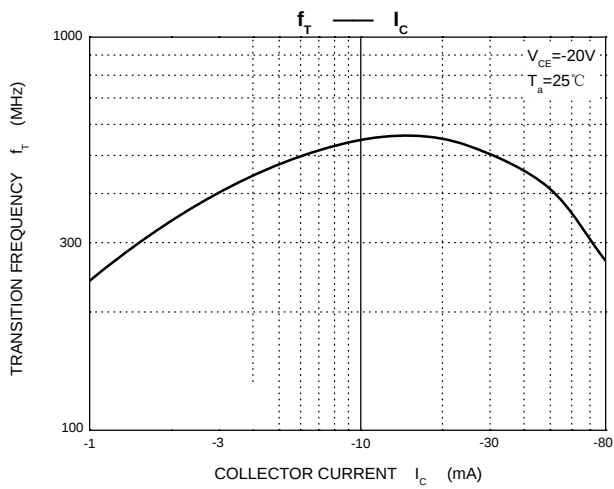

SOT-89-3L Package Outline Dimensions

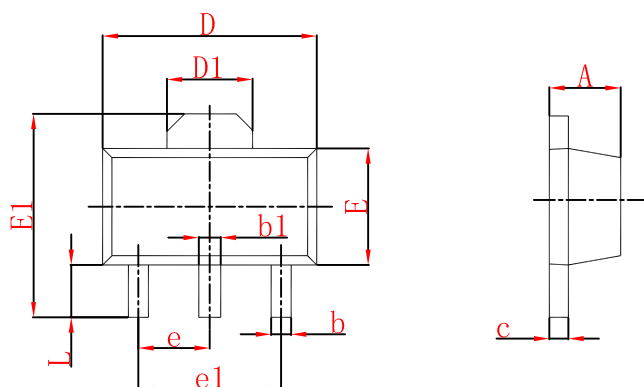

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

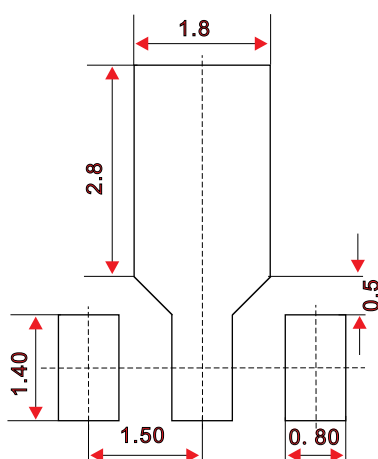

Note:
 1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05 mm.
 3. The pad layout is for reference purposes only.