


SOT-89-3L Plastic-Encapsulate Transistors

A42 TRANSISTOR (NPN)

• Features

- Complimentary to A92



1. BASE
2. COLLECTOR
3. EMITTER

SOT-89-3L

• MAXIMUM RATINGS (T_C=25°C)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V_{CBO}	300	V
Collector-Emitter Voltage	V_{CEO}	300	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	0.2	A
Collector Current -Pulsed	I_{CM}	0.5	A
Collector Power Dissipation	P_C	500	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	250	°C/W
Operation Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	°C







• ELECTRICAL CHARACTERISTICS (T_a=25°C)



Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	300			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	300			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=200V, I_E=0$			0.25	μA
	I_{CEX}	$V_{CE}=100V, V_X=5V$			5	μA
		$V_{CE}=300V, V_X=5V$			10	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE}=10V, I_C=1mA$	60			
	$h_{FE(2)}$	$V_{CE}=10V, I_C=10mA$	100		300	
	$h_{FE(3)}$	$V_{CE}=10V, I_C=30mA$	75			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=20mA, I_B=2mA$			0.2	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=20mA, I_B=2mA$			0.9	V
Transition frequency	f_T	$V_{CE}=20V, I_C=10mA, f=30MHz$	50			MHz

• Ordering Information:


Part NO.	A42
Marking	A42
Packing Information	REEL TAPE
Basic ordering unit (pcs)	1000

• Typical Characteristics

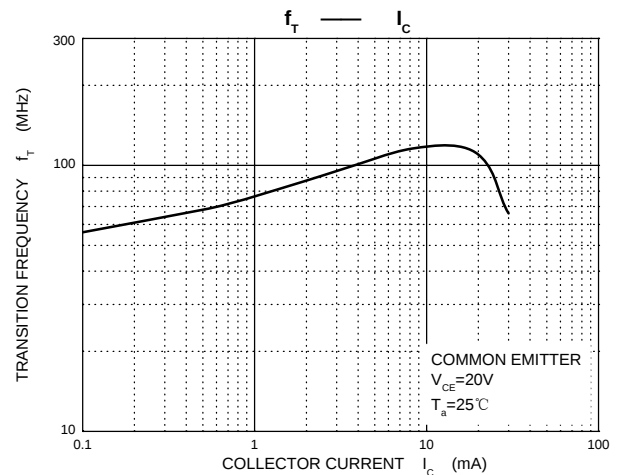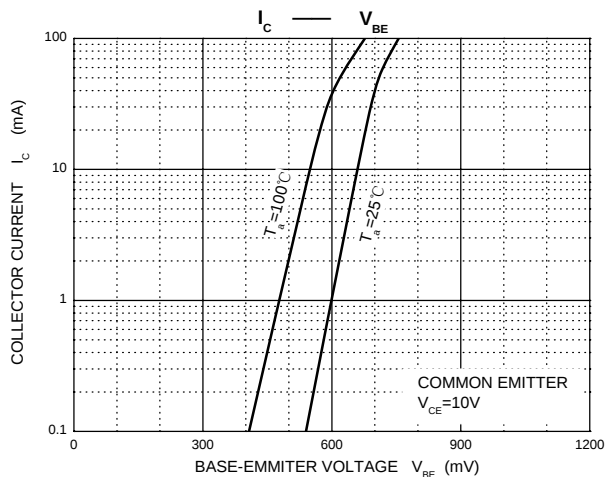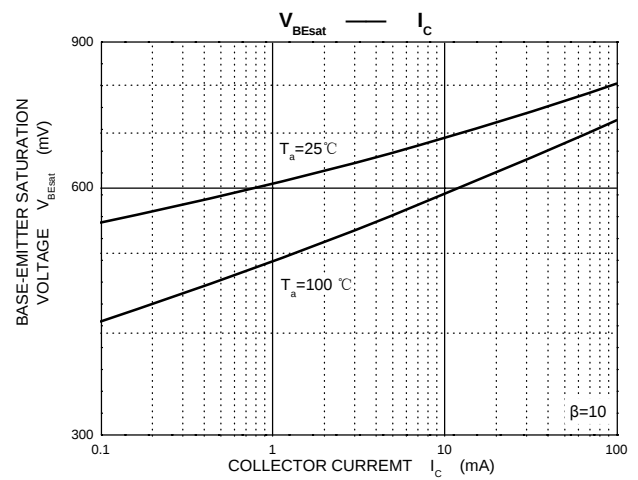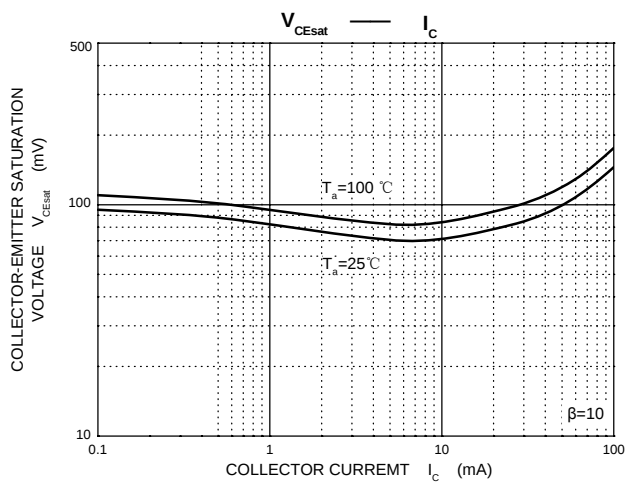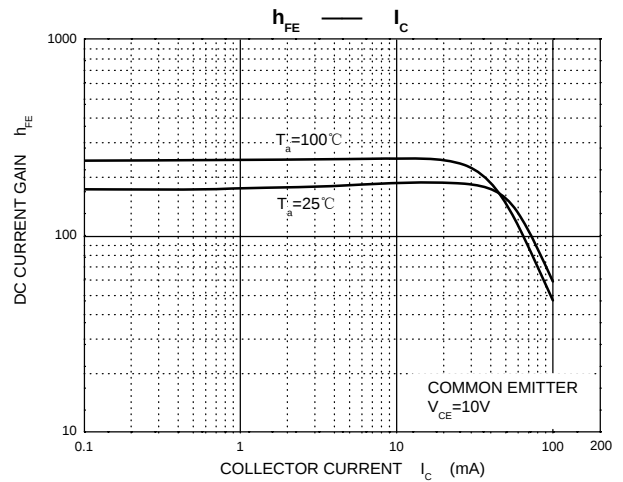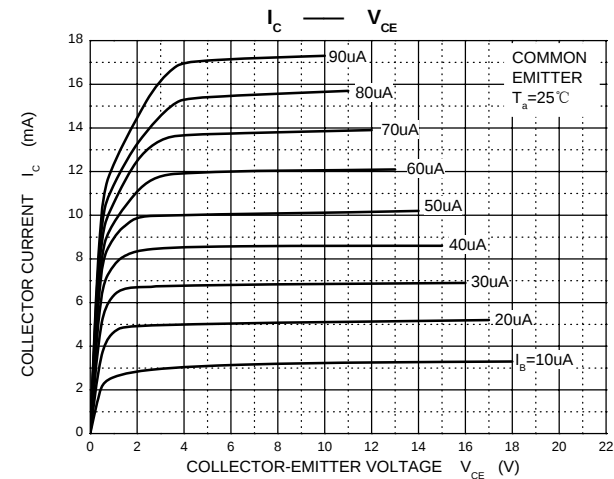


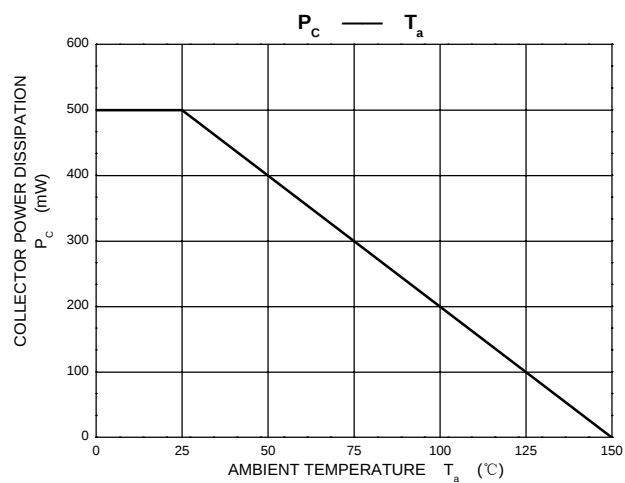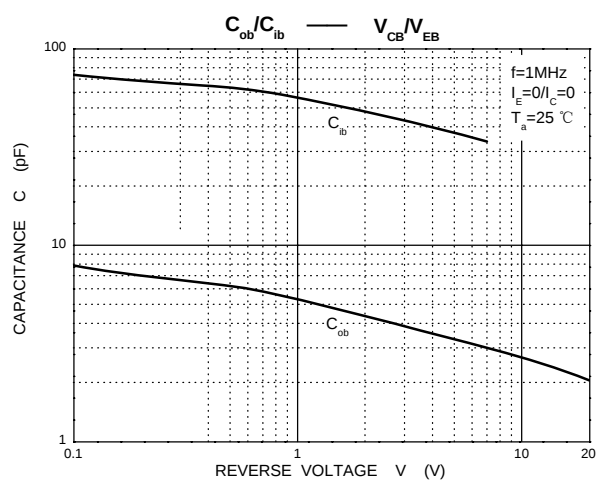

SOT-89-3L Package Outline Dimensions

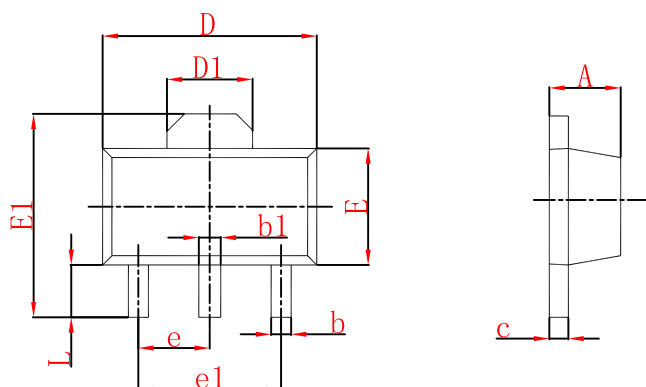

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

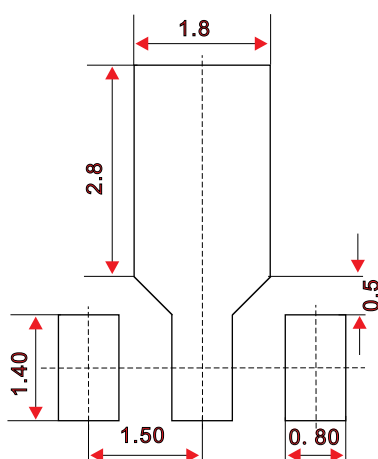

Note:
 1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05 mm.
 3. The pad layout is for reference purposes only.