

SMA Plastic-Encapsulate Diodes

SS12 THRU SS120

Schottky Rectifier Diodes

• Features

- $I_{F(AV)}$ 1A
- V_{RRM} 20V-200V
- High surge current capability
- Polarity: Color band denotes cathode

• Applications

- Rectifier


SMA (DO-214AC)

• MAXIMUM RATINGS

 $(T_C=25^{\circ}\text{C})$

Item	Symbol	Unit	Test Conditions	SS1								
				2	3	4	5	6	8	10	15	20
Repetitive Peak Reverse Voltage	V _{RRM}	V		20	30	40	50	60	80	100	150	200
Maximum RMS Voltage	V _{RMS}	V		14	21	28	35	42	56	70	105	140
Average Forward Current	I _{F(AV)}	A	60Hz Half-sine wave , Resistance load , FIG.1	1.0								
Surge(Non-repetitive)Forward Current	I _{FSM}	A	60Hz Half-sine wave , 1 cycle , Ta=25 ℃	30								
Junction Temperature	T _J	℃		-55~+125			-55~+150					
Storage Temperature	T _{STG}	℃		-55 ~ +150								

• ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$)

Item	Symbol	Unit	Test Condition		SS1								
					2	3	4	5	6	8	10	15	20
Peak Forward Voltage	V _F	V	I _F =1.0A		0.55			0.70		0.85		0.95	
Peak Reverse Current	I _{RRM1}	mA	V _{RM} =V _{RRM}	T _a =25℃	0.5				0.1				
	T _a =100℃			10				5.0					
Thermal Resistance(Typical)	R _{θJ-A}	℃/W	Between junction and ambient		65								
	Between junction and terminal		20										

Notes:

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

• Ordering Information:

Part NO.	SS12-SS120
Marking	SS1**
Packing Information	REEL TAPE
Basic ordering unit (pcs)	2000

• Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

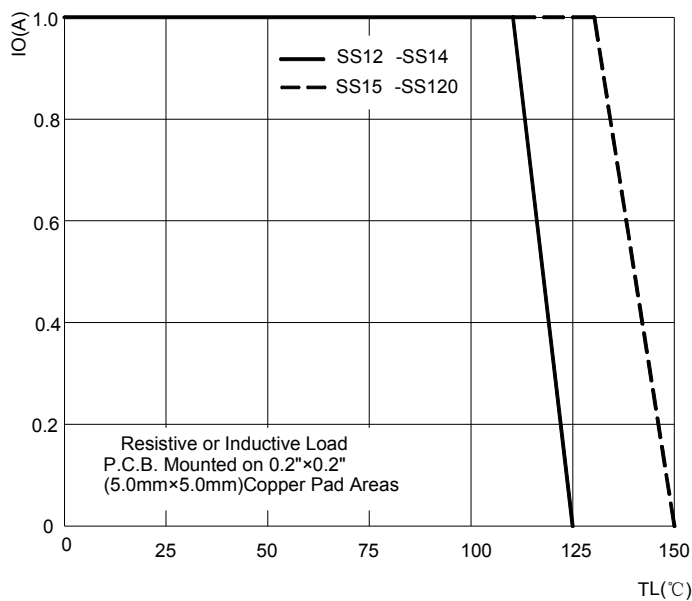


FIG2: Surge Forward Current Capability

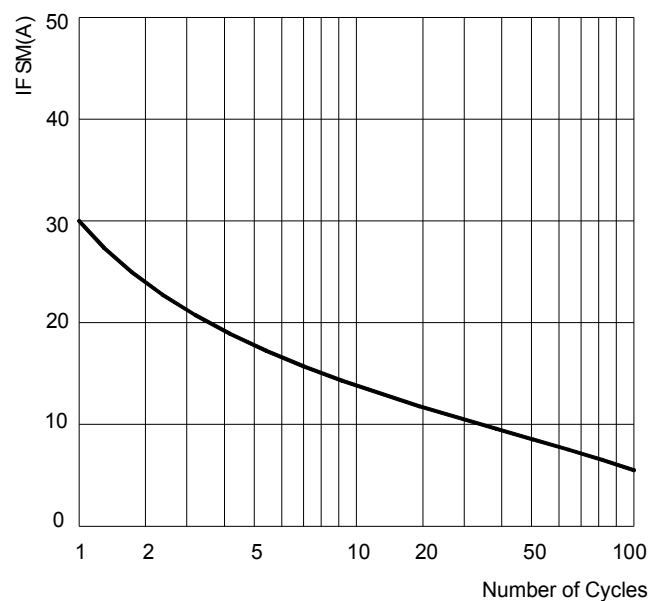


FIG.3: TYPICAL FORWARD CHARACTERISTICS



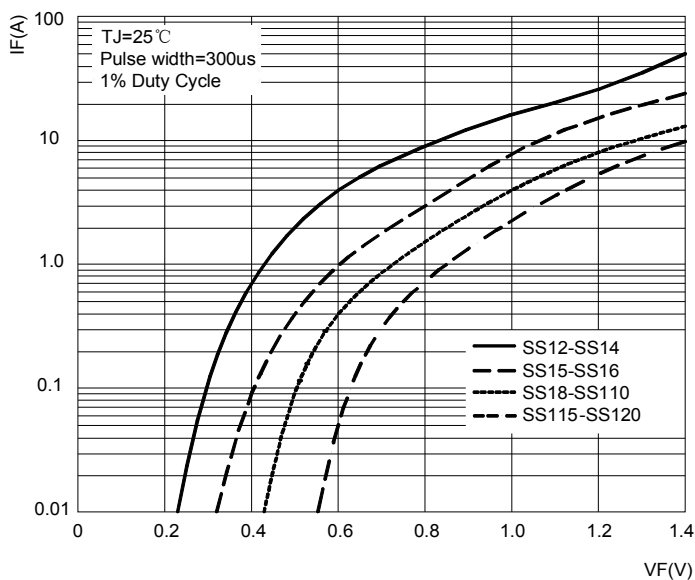



FIG.4: TYPICAL REVERSE CHARACTERISTICS

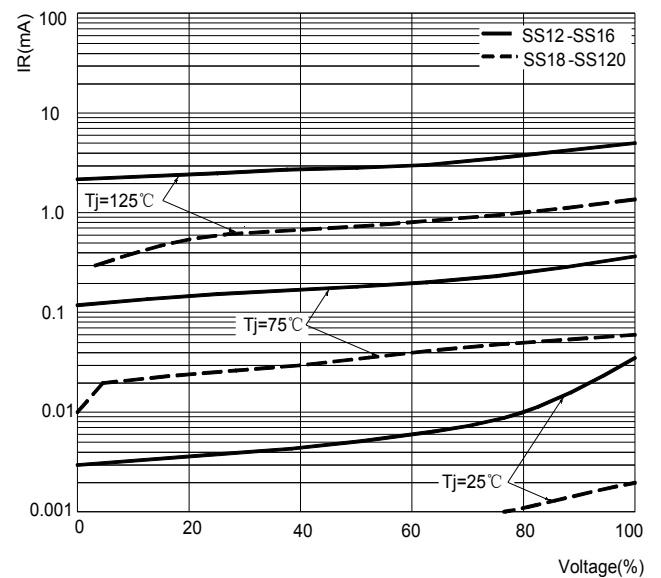

SMA Package Outline Dimensions

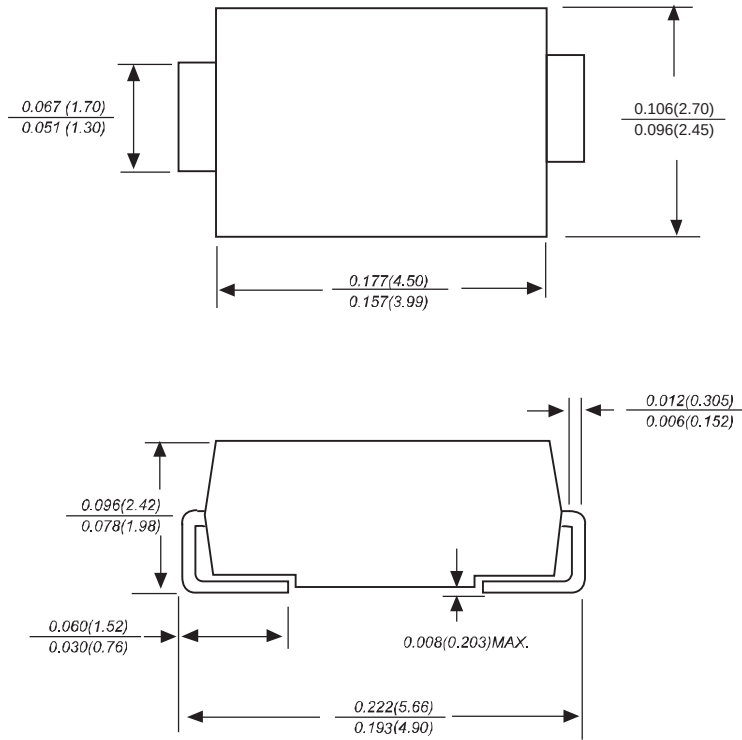

Dimensions in inches and (millimeters)

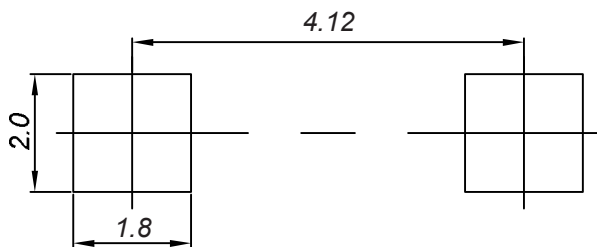

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.