

Product Summary


Part #	V_{DS}	$R_{DS(on).typ}$ (@ $V_{GS}=10V$)	$R_{DS(on).typ}$ (@ $V_{GS}=4.5V$)	I_D
EFM140N03D	30V	14m Ω	19m Ω	20A

Description


- The EFM140N03D is the high cell density trenched
- N-ch MOSFETs which provide excellent
- RDSON and gate charge for most of the
- synchronous buck converter applications.
- The EFM140N03D meet the RoHS and Green
- Product requirement, 100 % EAS guaranteed
- with full function reliability approved.

Application

- Super Low Gate Charge 100% EAS Guaranteed
- Green Device Available Excellent CdV/dt effect decline
- Advanced high cell density Trench technology



N-Channel MOSFET

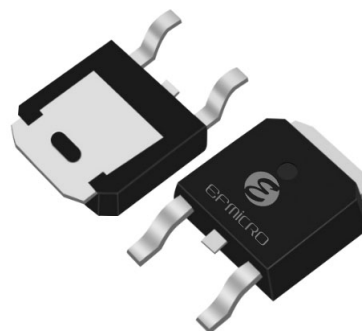

TO-252-2L

Ordering Information:

Part NO.	EFM140N03D
Marking	140N03D****
Packing Information	REEL TAPE
Basic ordering unit (pcs)	2500

Absolute Maximum Ratings ($T_C=25^{\circ}C$)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	20	A
Drain Current-Pulsed ^(Note 1)	I_{DM}	65	A
Maximum Power Dissipation	P_D	40	W
Single pulse avalanche energy ^(Note 5)	E_{AS}	72	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	$^{\circ}C$

Thermal Characteristic

Thermal Resistance, Junction-to-Ambient ^(Note 2)	$R_{\theta JC}$	3.8	$^{\circ}C/W$
---	-----------------	-----	---------------

• Static Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise stated)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250uA	30	--	--	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =30V V _{GS} =0V	--	--	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V V _{DS} =0V	--	--	±100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =250uA	1.0	1.5	2.0	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V I _D =20A	--	14	18	mΩ
		V _{GS} =4.5V I _D =10A	--	19	25	mΩ
Forward Transconductance	g _{FS}	V _{DS} =5V I _D =15A	26	--	--	S
Dynamic Characteristics (Note4)						
Input Capacitance	C _{Iss}	V _{DS} =15V V _{GS} =0V F=1.0MHz	--	938	--	PF
Output Capacitance	C _{Oss}		--	142	--	PF
Reverse Transfer Capacitance	C _{rss}		--	99	--	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	t _{d(on)}	V _{DD} =15V I _D =20A V _{GS} =10V R _G =3Ω,	--	5	--	nS
Turn-on Rise Time	t _r		--	12	--	nS
Turn-Off Delay Time	t _{d(off)}		--	19	--	nS
Turn-Off Fall Time	t _f		--	6	--	nS
Total Gate Charge	Q _g	V _{DS} =15V I _D =20A V _{GS} =10V	--	17.5	--	nC
Gate-Source Charge	Q _{gs}		--	3	--	nC
Gate-Drain Charge	Q _{gd}		--	4.1	--	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V _{SD}	V _{GS} =0V I _S =20A	--	--	1.2	V
Diode Forward Current (Note 2)	I _S		--	--	30	A

Notes:


1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production
5. EAS condition: $T_J=25^\circ\text{C}$, $V_{DD}=30V$, $V_G=10V$, $L=0.5mH$, $R_g=25\Omega$

• Test circuit


1) E_{AS} test Circuits

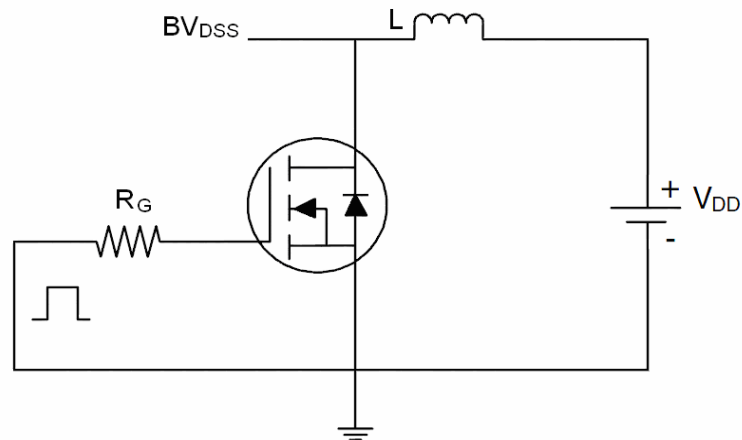

2) Gate charge test Circuit:

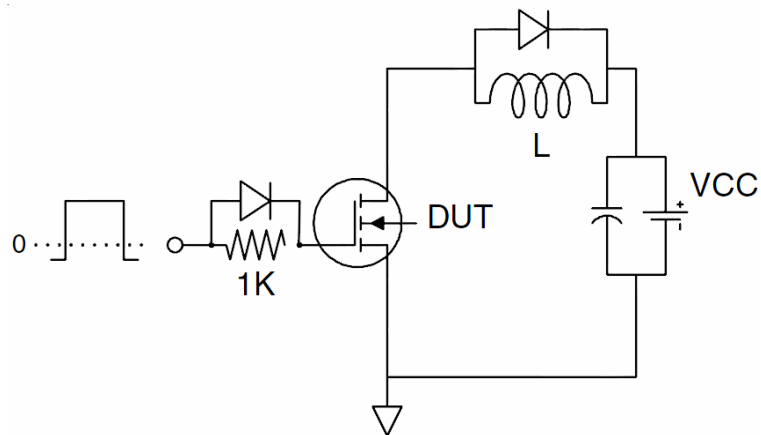

3) Switch Time Test Circuit:

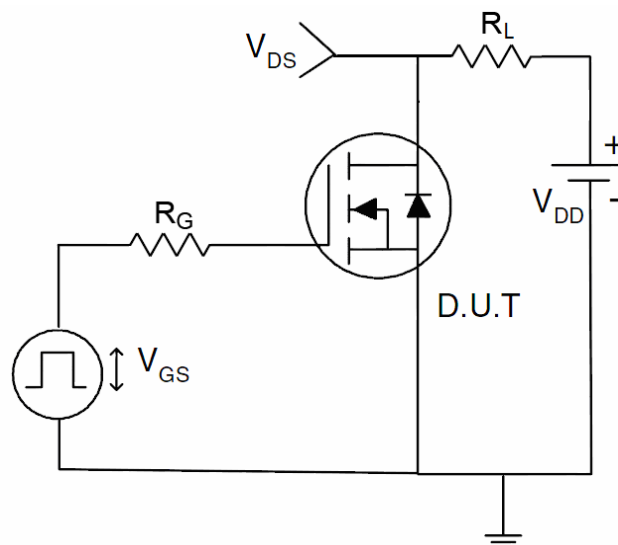

• Typical Characteristics

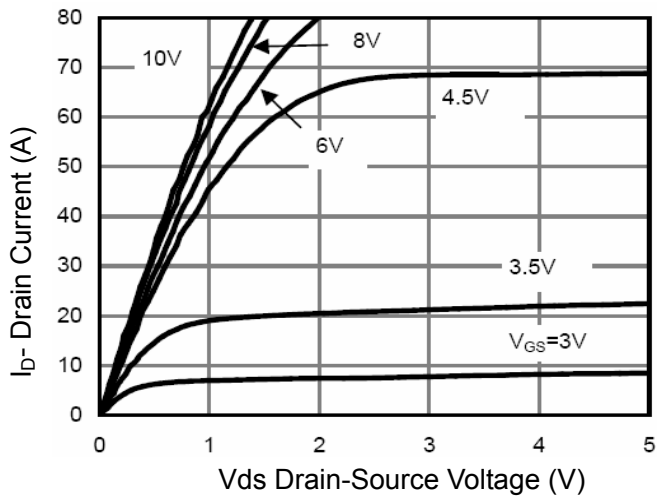


Figure 1 Output Characteristics

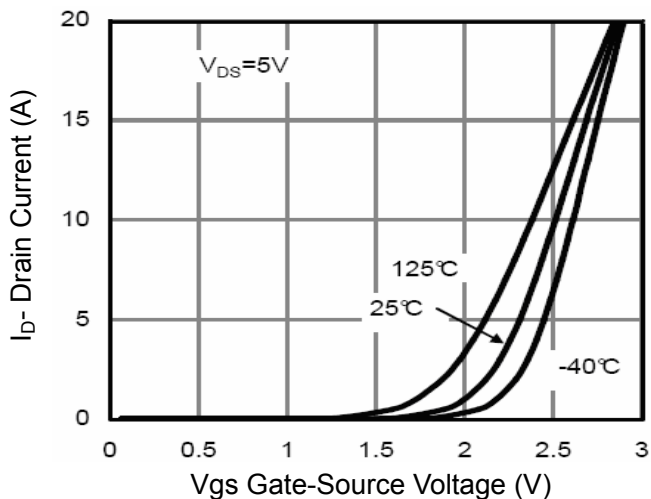


Figure 2 Transfer Characteristics

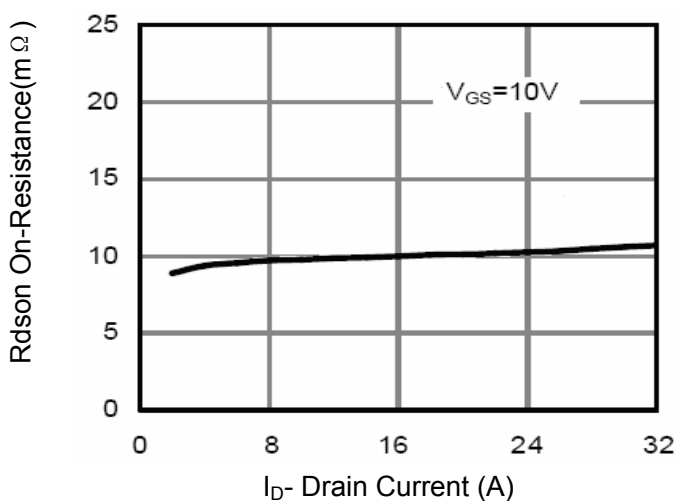


Figure 3 $R_{DS(on)}$ - Drain Current

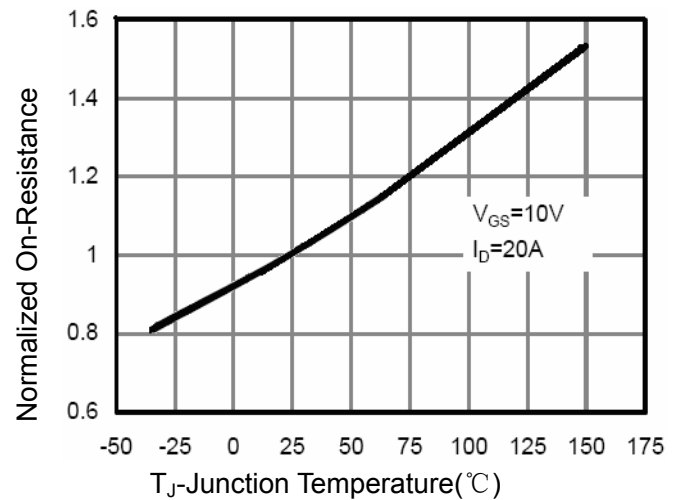


Figure 4 $R_{DS(on)}$ -Junction Temperature

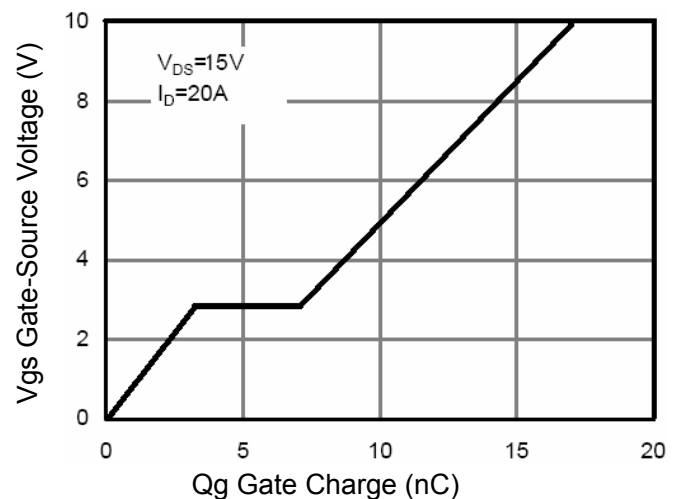


Figure 5 Gate Charge

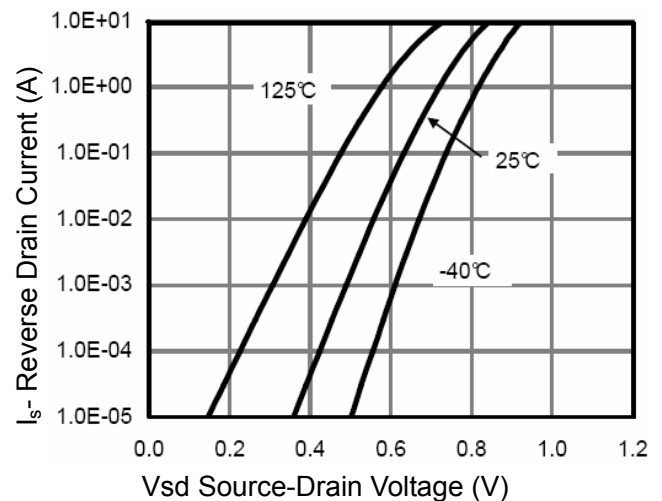


Figure 6 Source- Drain Diode Forward

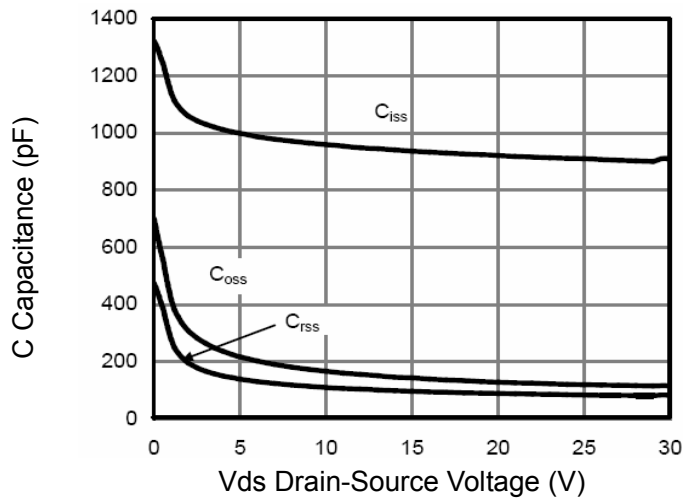


Figure 7 Capacitance vs Vds

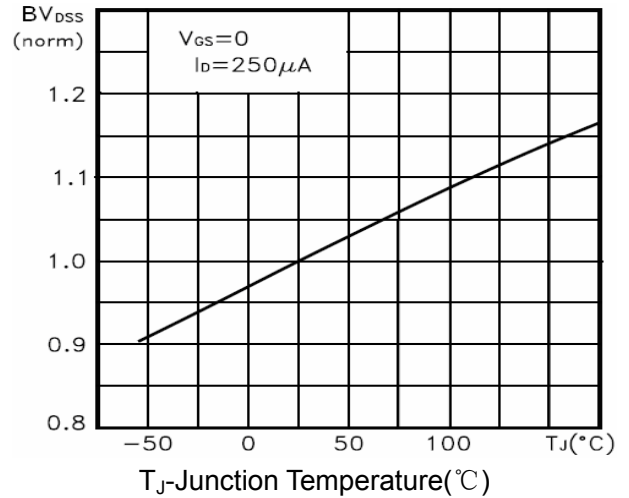


Figure 9 BV_{DSS} vs Junction Temperature

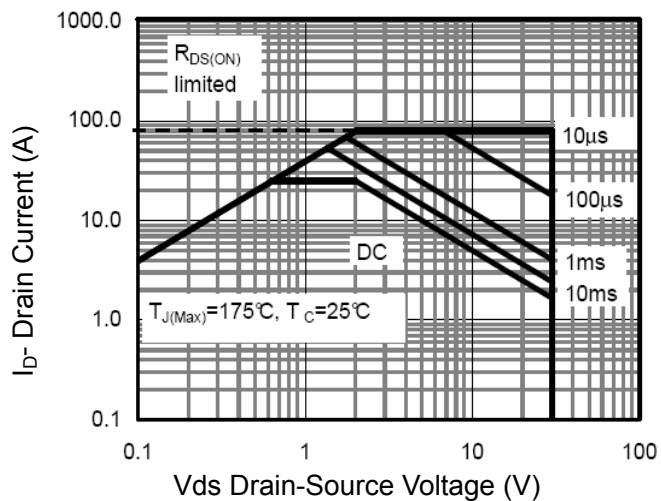


Figure 8 Safe Operation Area

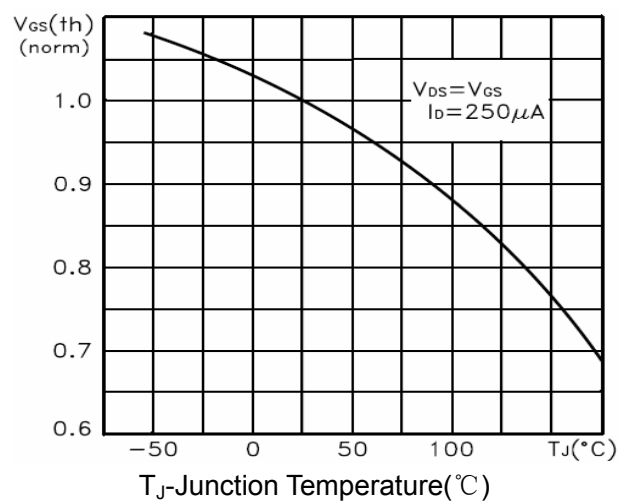


Figure 10 $V_{GS(th)}$ vs Junction Temperature


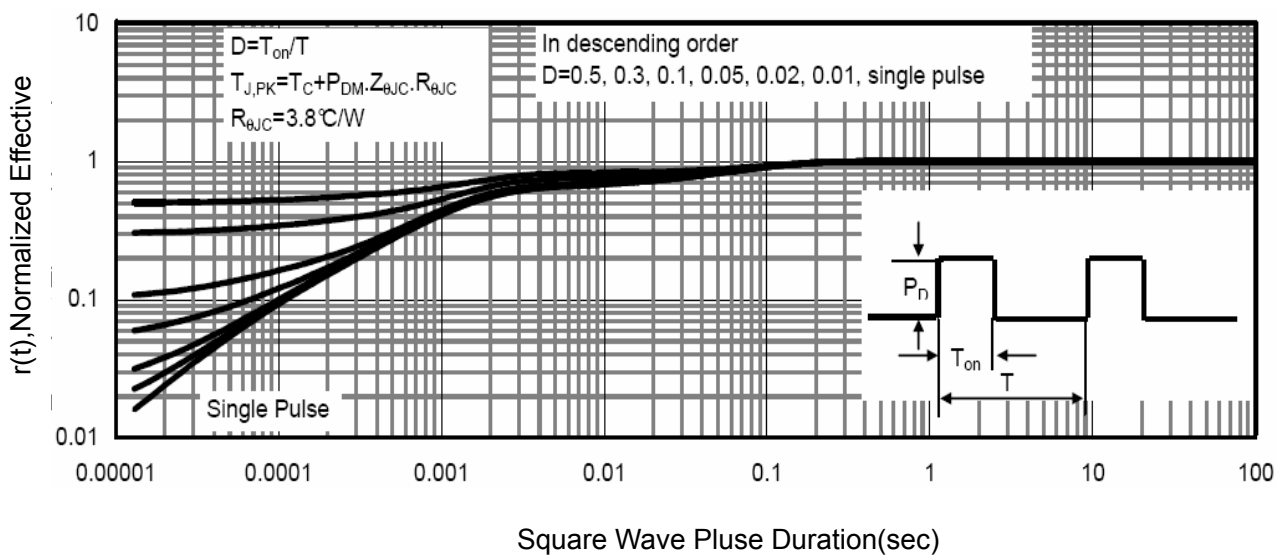


Figure 11 Normalized Maximum Transient Thermal Impedance

TO-252 Package Information

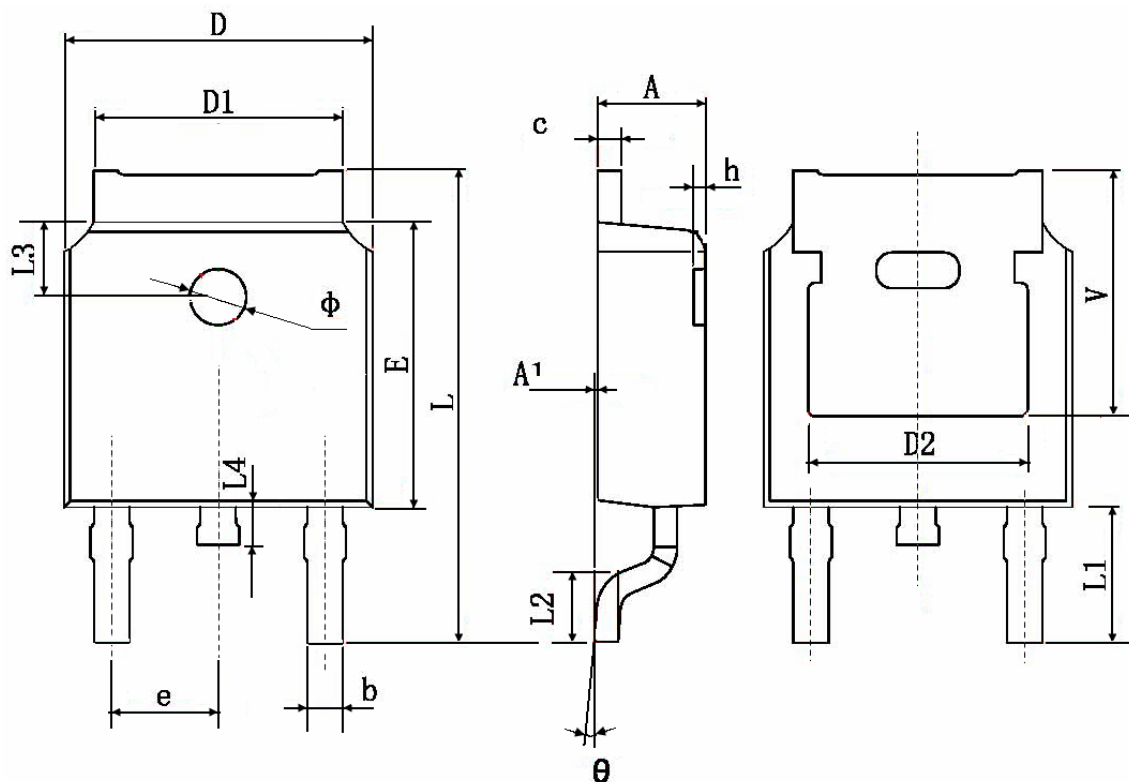

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.83 TYP.		0.190 TYP.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 TYP.		0.114 TYP.	
L2	1.400	1.700	0.055	0.067
L3	1.600 TYP.		0.063 TYP.	
L4	0.600	1.000	0.024	0.039
φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 TYP.		0.211 TYP.	